

304 Stainless Steel | Single Door | IP66 IK10

VE-304-302015

300H x 200W x 150D


VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

Protection Rating: IP66 IK10

Standards and Certifications: IEC/EN 60529, IEC/EN 62208

Materials:

- Body: 1.5mm grade 304L stainless steel
- Door: 1.5mm grade 304L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 304L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8 μm
- Mass: 4 Kg.

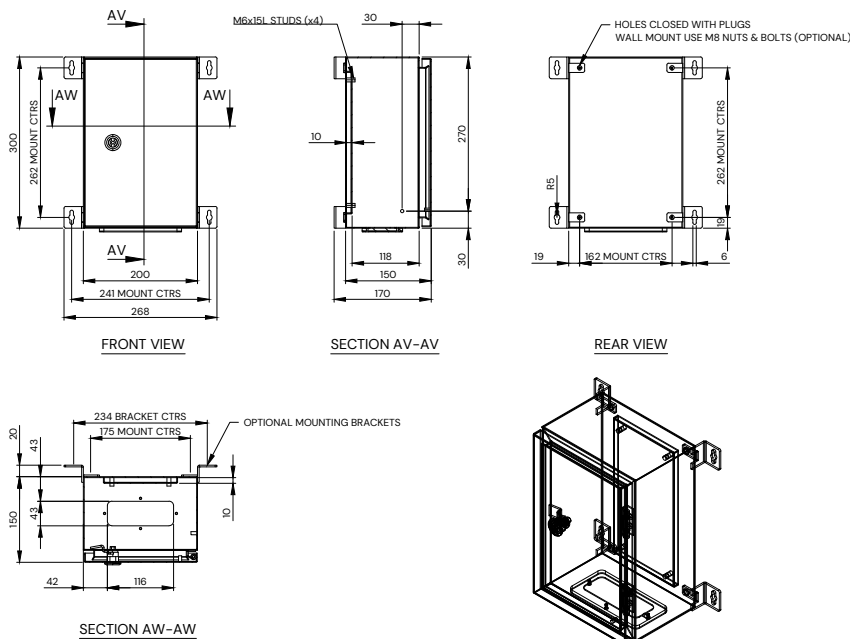

304 Stainless Steel | Single Door | IP66 IK10

VE-304-404020

400H x 400W x 200D


VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

Protection Rating: IP66 IK10

Standards and Certifications: IEC/EN 60529, IEC/EN 62208

Materials:

- Body: 1.5mm grade 304L stainless steel
- Door: 1.5mm grade 304L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 304L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8 μm
- Mass: 10 Kg.

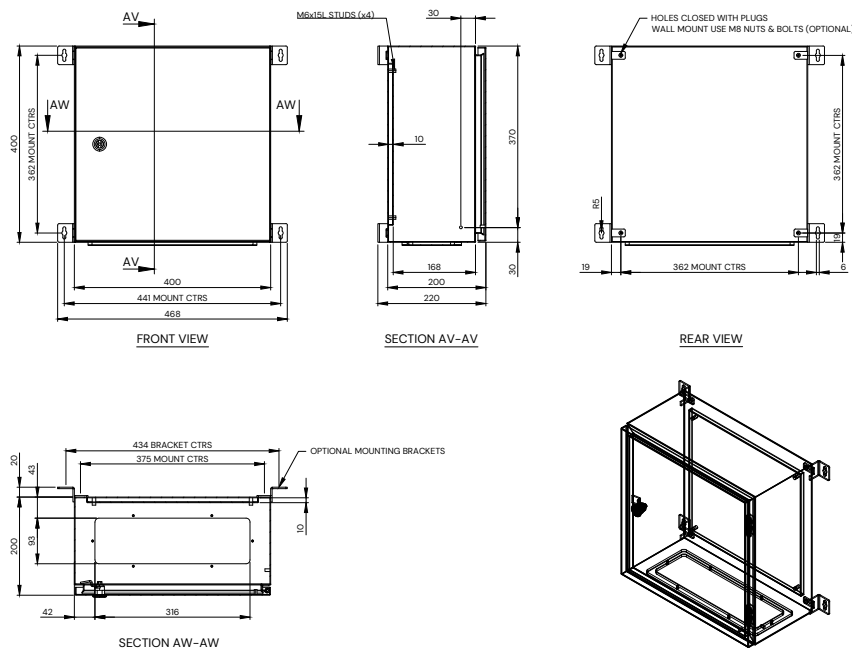

304 Stainless Steel | Single Door | IP66 IK10

VE-304-604020

600H x 400W x 200D


VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

Protection Rating: IP66 IK10

Standards and Certifications: IEC/EN 60529, IEC/EN 62208

Materials:

- Body: 1.5mm grade 304L stainless steel
- Door: 1.5mm grade 304L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 304L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8 μm
- Mass: 14 Kg.

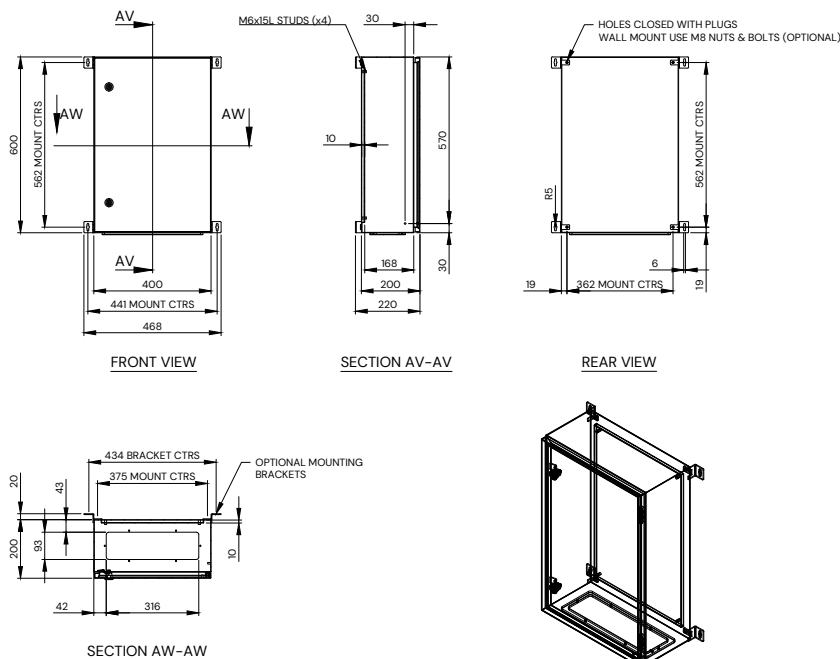

304 Stainless Steel | Single Door | IP66 IK10

VE-304-606030

600H x 600W x 300D

VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

Protection Rating: IP66 IK10

Standards and Certifications: IEC/EN 60529, IEC/EN 62208

Materials:

- Body: 1.5mm grade 304L stainless steel
- Door: 1.5mm grade 304L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 304L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8 μm
- Mass: 22 Kg.

