

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-303015

300H x 300W x 150D


VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 6 Kg.

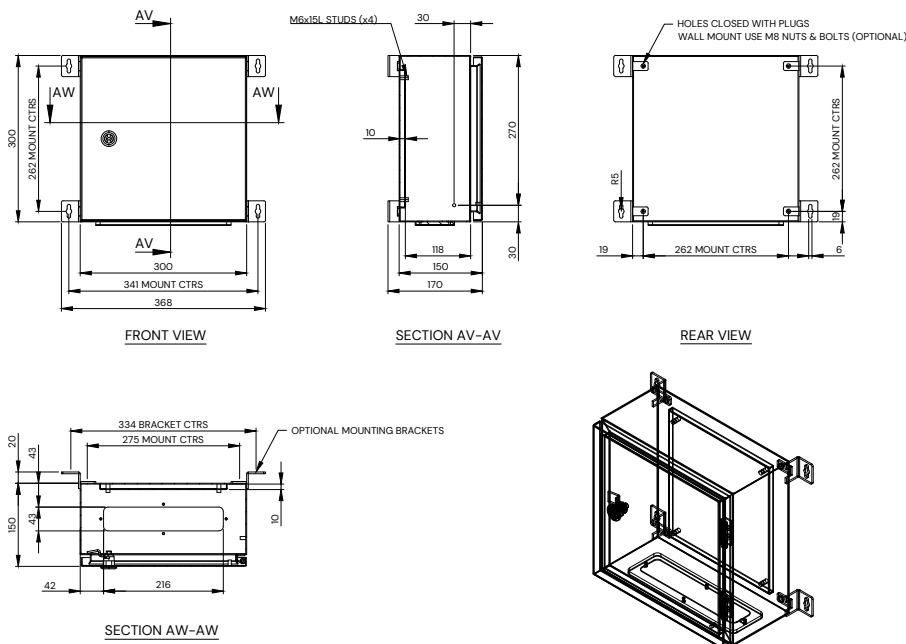

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-403020

400H x 300W x 200D


VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 8 Kg.

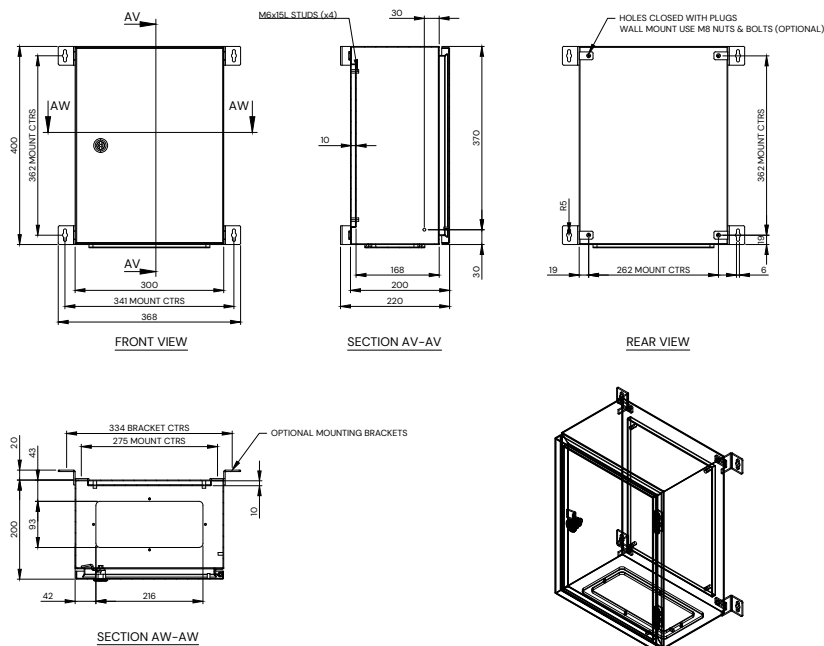

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-404020

400H x 400W x 200D


VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 10 Kg.

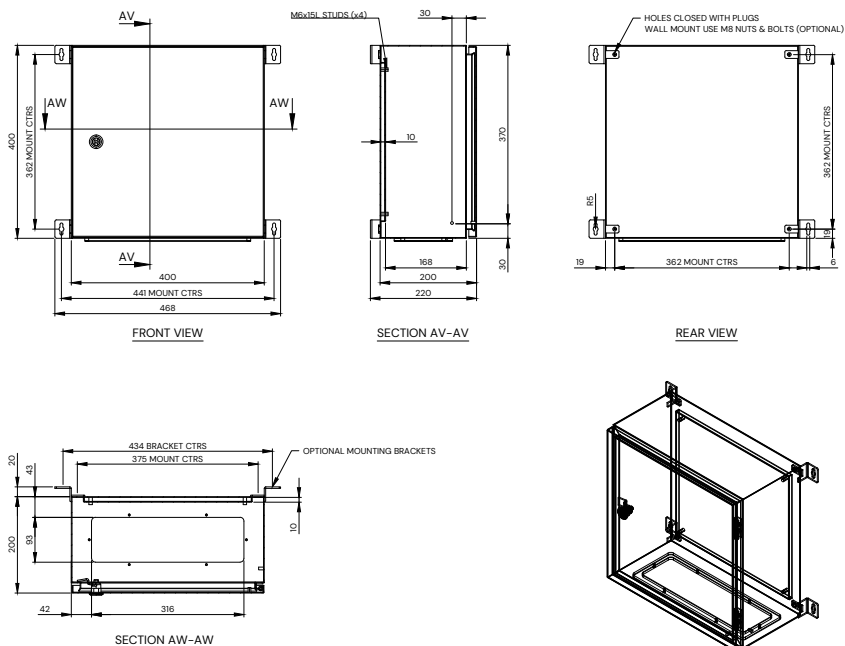

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-504025

500H x 400W x 250D





VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 13 Kg.

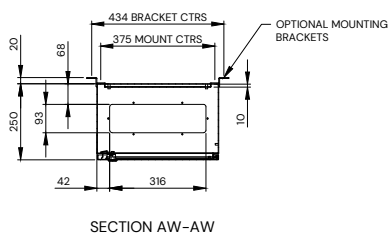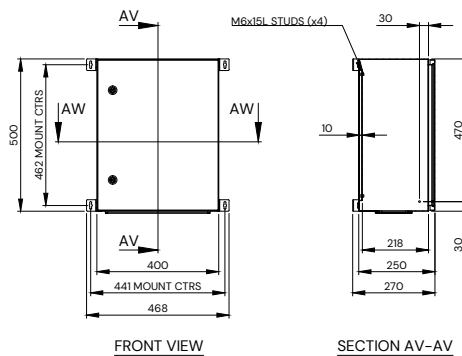

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-606030

600H x 600W x 300D

VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 22 Kg.

