

Steel | Single Door | IP66 IK10

# VE-303020

300H x 300W x 200D


VERSCH Steel Wall-Mount Electrical Enclosures (RAL7035 Grey) deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in powder-coated galvanised steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                    |                                |
|--------------------|--------------------------------|
| Body:              | 1.2mm electro-galvanised steel |
| Door:              | 1.5mm electro-galvanised steel |
| Mounting Plate:    | 1.5mm electro-galvanised steel |
| Gland Plate:       | 1.5mm electro-galvanised steel |
| Seal:              | Polyurethane                   |
| Surface Treatment: | Powder-coat 80-120micron       |
| Colour:            | RAL7035                        |
| Mass:              | 6 Kg.                          |

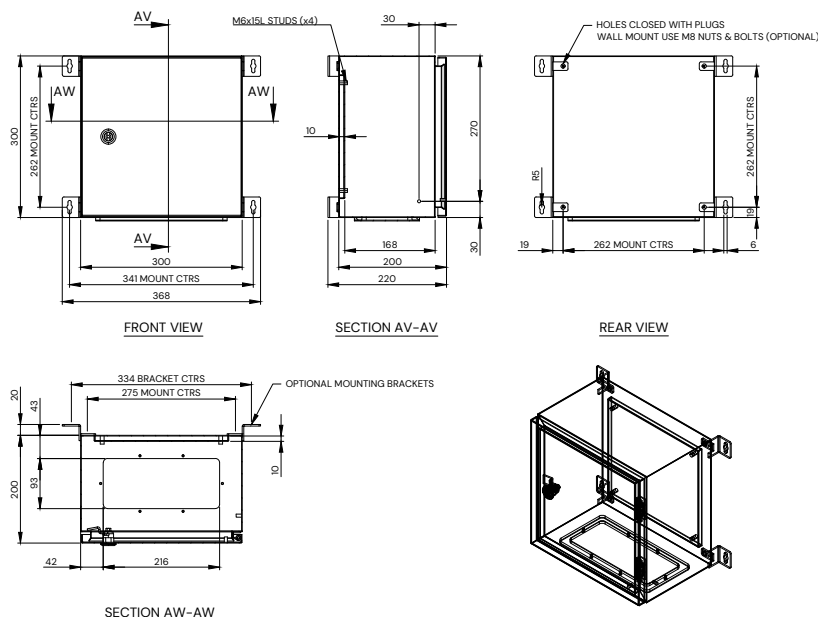

Steel | Single Door | IP66 IK10

# VE-403020

400H x 300W x 200D





VERSCH Steel Wall-Mount Electrical Enclosures (RAL7035 Grey) deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in powder-coated galvanised steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

## Materials:

|                    |                                |
|--------------------|--------------------------------|
| Body:              | 1.2mm electro-galvanised steel |
| Door:              | 1.5mm electro-galvanised steel |
| Mounting Plate:    | 1.5mm electro-galvanised steel |
| Gland Plate:       | 1.5mm electro-galvanised steel |
| Seal:              | Polyurethane                   |
| Surface Treatment: | Powder-coat 80-120micron       |
| Colour:            | RAL7035                        |
| Mass:              | 7 Kg.                          |

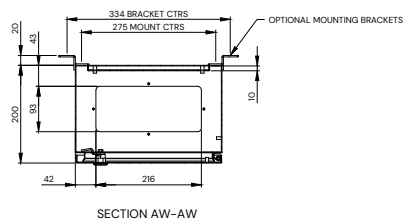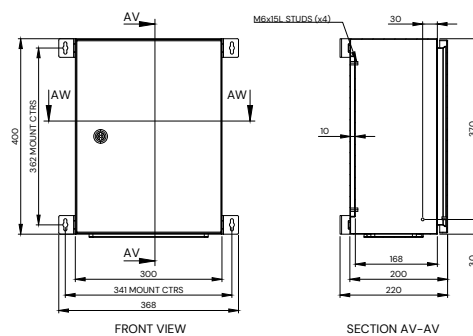



Steel | Single Door | IP66 IK10

# VE-504020

500H x 400W x 200D


VERSCH Steel Wall-Mount Electrical Enclosures (RAL7035 Grey) deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in powder-coated galvanised steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                    |                                |
|--------------------|--------------------------------|
| Body:              | 1.2mm electro-galvanised steel |
| Door:              | 1.5mm electro-galvanised steel |
| Mounting Plate:    | 1.5mm electro-galvanised steel |
| Gland Plate:       | 1.5mm electro-galvanised steel |
| Seal:              | Polyurethane                   |
| Surface Treatment: | Powder-coat 80-120micron       |
| Colour:            | RAL7035                        |
| Mass:              | 11 Kg.                         |

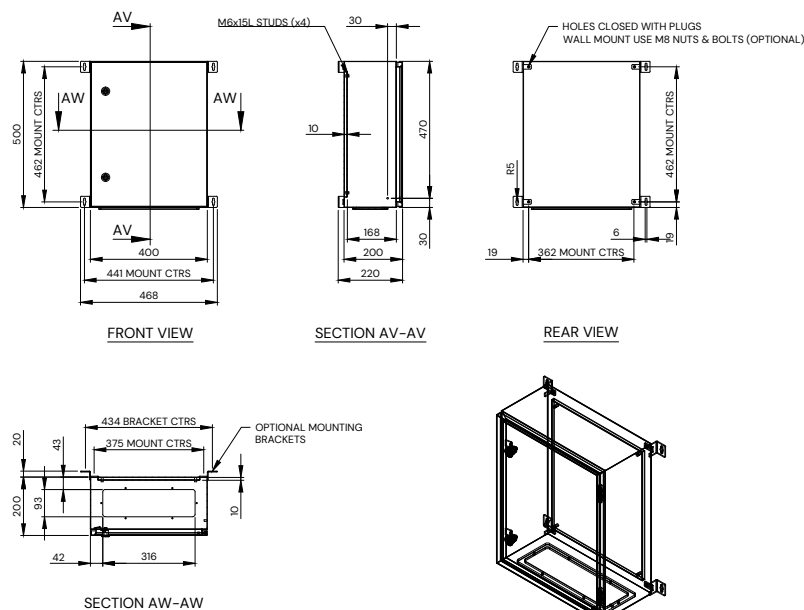

Steel | Single Door | IP66 IK10

# VE-604025

600H x 400W x 250D



VERSCH Steel Wall-Mount Electrical Enclosures (RAL7035 Grey) deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in powder-coated galvanised steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

## Materials:

|                    |                                |
|--------------------|--------------------------------|
| Body:              | 1.2mm electro-galvanised steel |
| Door:              | 1.5mm electro-galvanised steel |
| Mounting Plate:    | 1.5mm electro-galvanised steel |
| Gland Plate:       | 1.5mm electro-galvanised steel |
| Seal:              | Polyurethane                   |
| Surface Treatment: | Powder-coat 80-120micron       |
| Colour:            | RAL7035                        |
| Mass:              | 13 Kg.                         |

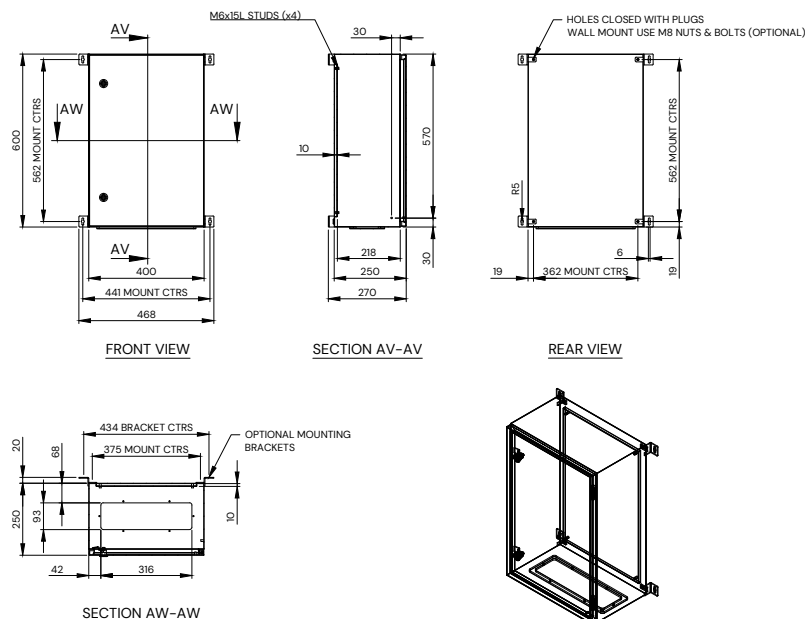

Steel | Single Door | IP66 IK10

# VE-606030

600H x 600W x 300D



VERSCH Steel Wall-Mount Electrical Enclosures (RAL7035 Grey) deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in powder-coated galvanised steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                    |                                |
|--------------------|--------------------------------|
| Body:              | 1.2mm electro-galvanised steel |
| Door:              | 1.5mm electro-galvanised steel |
| Mounting Plate:    | 1.5mm electro-galvanised steel |
| Gland Plate:       | 1.5mm electro-galvanised steel |
| Seal:              | Polyurethane                   |
| Surface Treatment: | Powder-coat 80-120micron       |
| Colour:            | RAL7035                        |
| Mass:              | 19 Kg.                         |

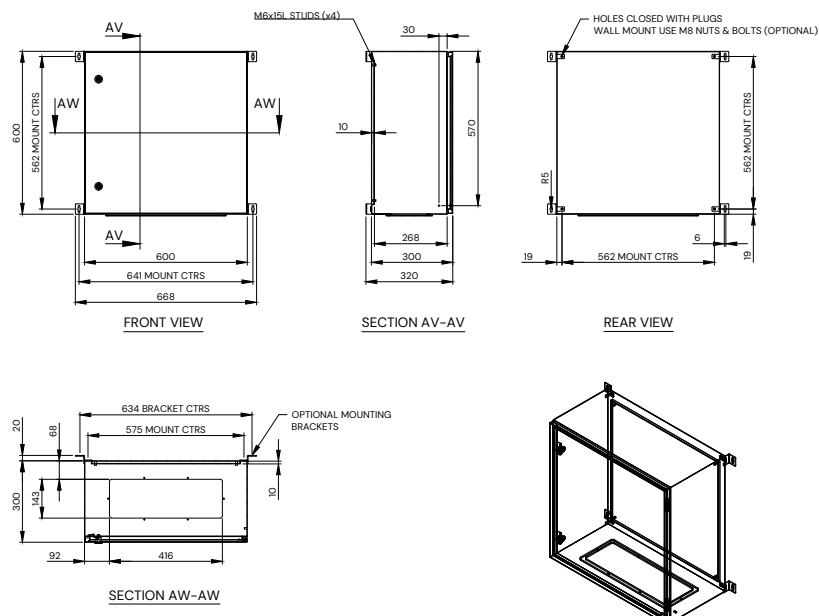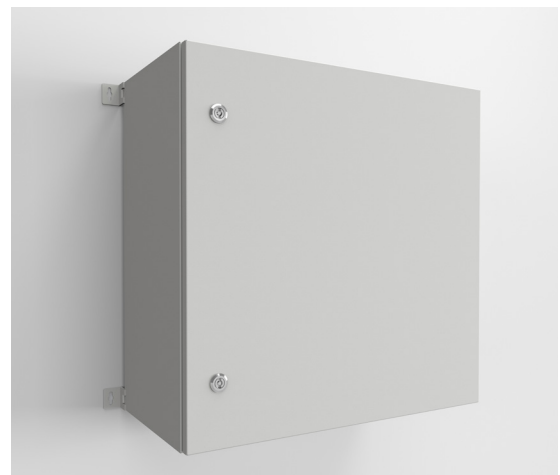

304 Stainless Steel | Single Door | IP66 IK10

# VE-304-302015

300H x 200W x 150D





VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 304L stainless steel                      |
| Door:           | 1.5mm grade 304L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 304L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 4 Kg.                                                 |

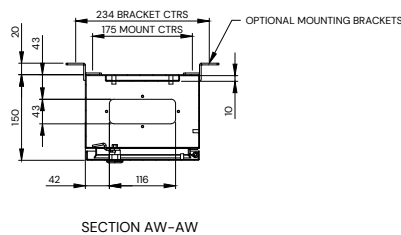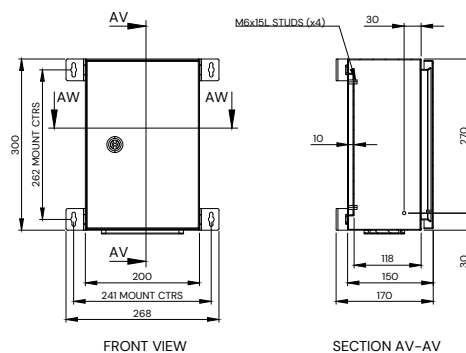

304 Stainless Steel | Single Door | IP66 IK10

# VE-304-404020

400H x 400W x 200D


VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 304L stainless steel                      |
| Door:           | 1.5mm grade 304L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 304L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 10 Kg.                                                |

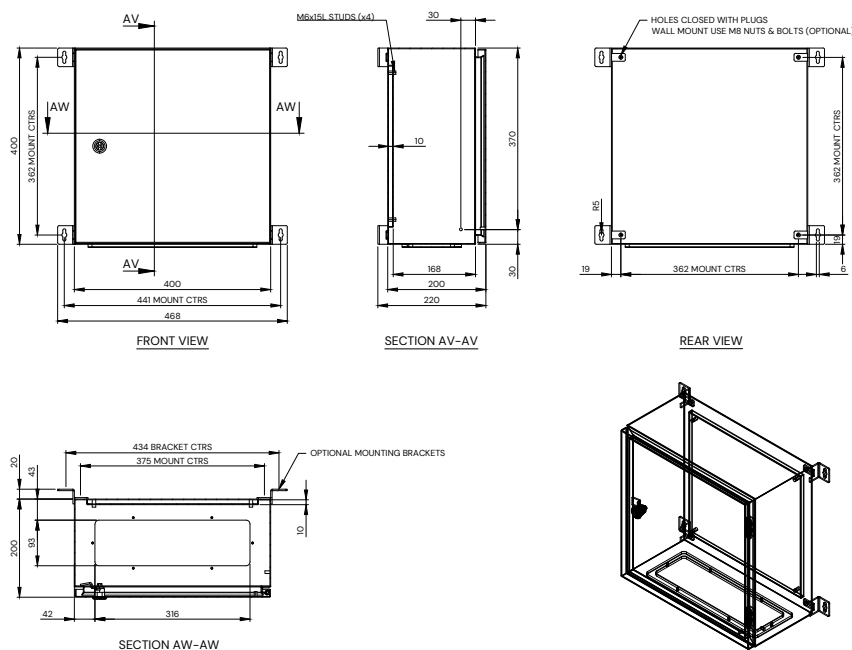

304 Stainless Steel | Single Door | IP66 IK10

# VE-304-504025

500H x 400W x 250D


VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 304L stainless steel                      |
| Door:           | 1.5mm grade 304L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 304L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 13 Kg.                                                |

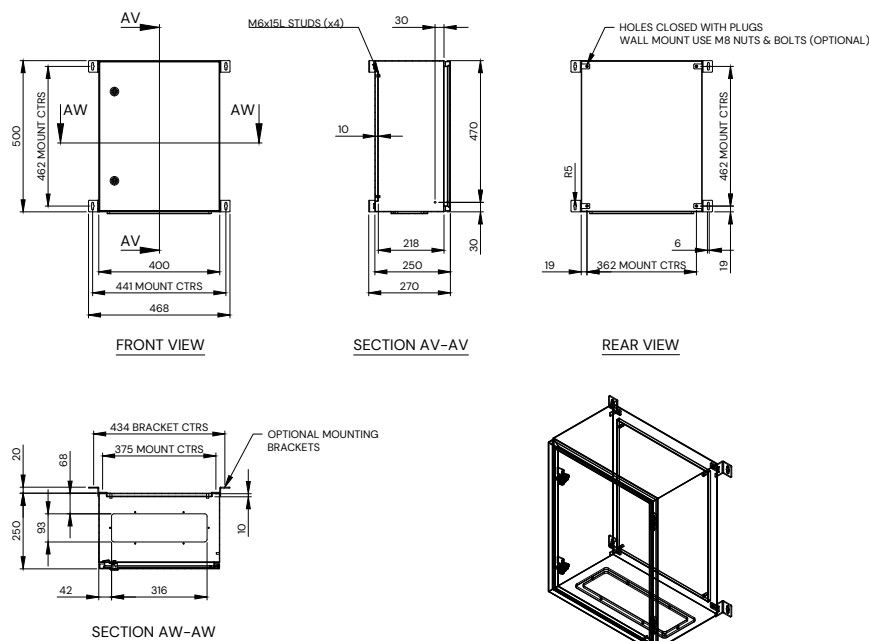



304 Stainless Steel | Single Door | IP66 IK10

# VE-304-606030

600H x 600W x 300D



VERSCH 304 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 304L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 304L stainless steel                      |
| Door:           | 1.5mm grade 304L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 304L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 22 Kg.                                                |

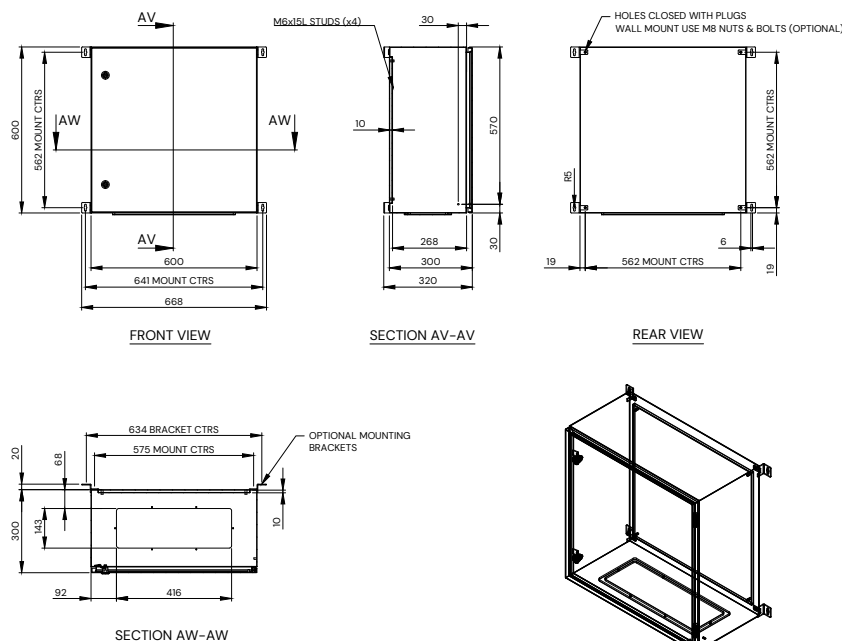

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-303015

300H x 300W x 150D





VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 316L stainless steel                      |
| Door:           | 1.5mm grade 316L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 316L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 6 Kg.                                                 |

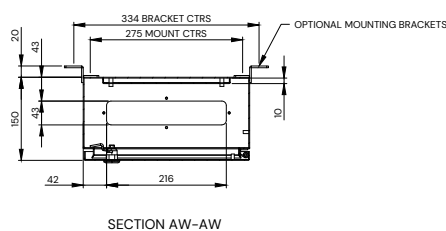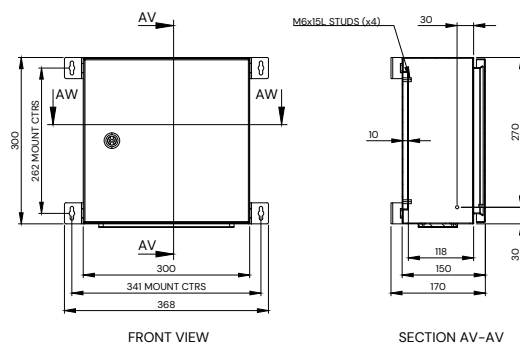



316 Stainless Steel | Single Door | IP66 IK10

# VE-316-404020

400H x 400W x 200D



VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 316L stainless steel                      |
| Door:           | 1.5mm grade 316L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 316L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 10 Kg.                                                |

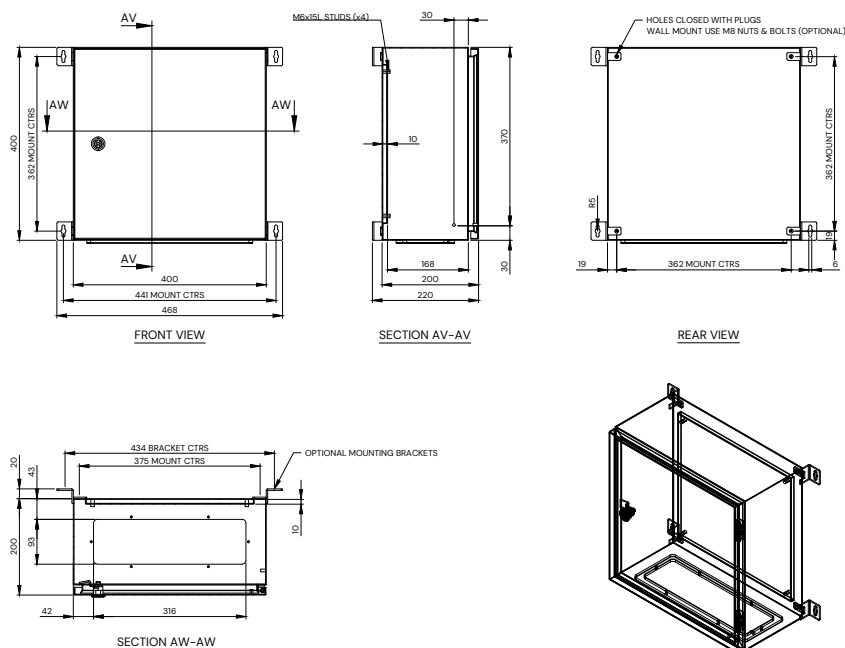

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-504025

500H x 400W x 250D





VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking — certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 316L stainless steel                      |
| Door:           | 1.5mm grade 316L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 316L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 13 Kg.                                                |

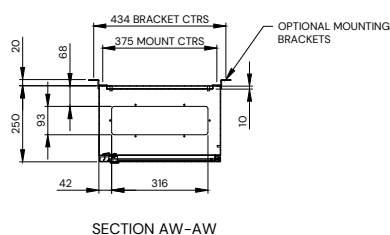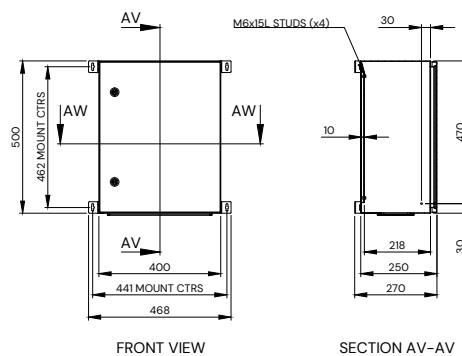

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-606030

600H x 600W x 300D

VERSCH 316 Stainless Steel Wall-Mount Electrical Enclosures deliver dependable IP66 IK10 protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane gasket seal and secure quarter-turn locking – certified to IEC/EN 60529 and IEC/EN 62208. Suitable for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

|                 |                                                       |
|-----------------|-------------------------------------------------------|
| Body:           | 1.5mm grade 316L stainless steel                      |
| Door:           | 1.5mm grade 316L stainless steel                      |
| Mounting Plate: | 1.5mm electro-galvanised steel                        |
| Gland Plate:    | 1.5mm grade 316L stainless steel                      |
| Seal:           | Polyurethane                                          |
| Surface Finish: | 4B finishing which equals to 0.4 to 0.8 $\mu\text{m}$ |
| Mass:           | 22 Kg.                                                |

