

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-303015

300H x 300W x 150D


Versch 316 Stainless Steel Wall-Mounted Electrical Enclosures deliver dependable protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane seal and secure locking, this series is engineered to achieve IP66 ingress protection, providing solid performance for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 6 Kg.

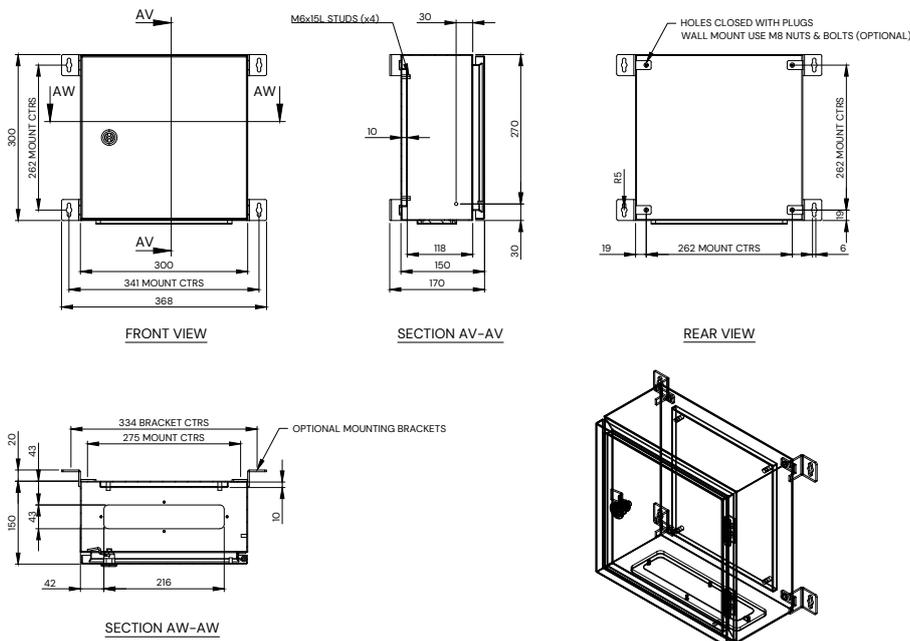

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-403020

400H x 300W x 200D


Versch 316 Stainless Steel Wall-Mounted Electrical Enclosures deliver dependable protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane seal and secure locking, this series is engineered to achieve IP66 ingress protection, providing solid performance for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 8 Kg.

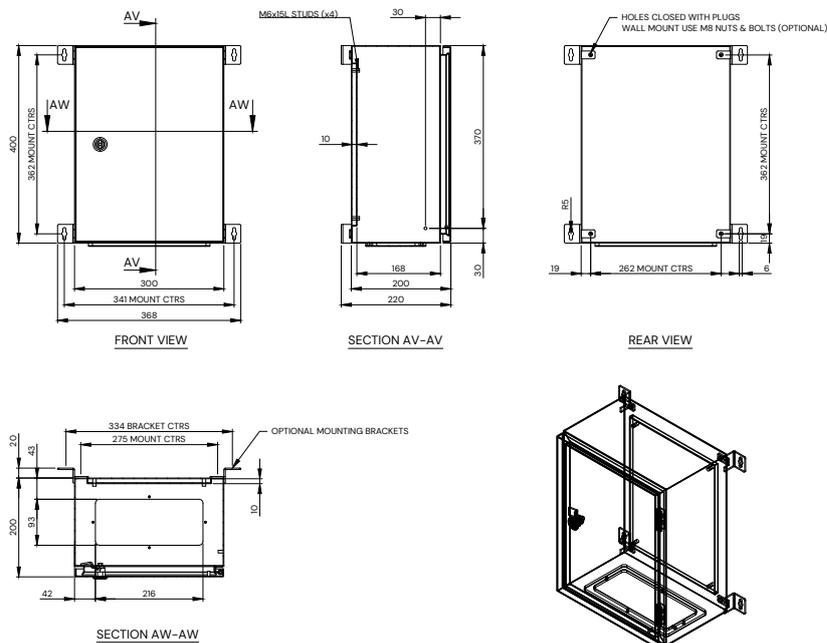

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-404020

400H x 400W x 200D



Versch 316 Stainless Steel Wall-Mounted Electrical Enclosures deliver dependable protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane seal and secure locking, this series is engineered to achieve IP66 ingress protection, providing solid performance for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 10 Kg.

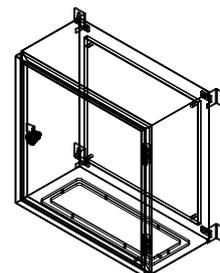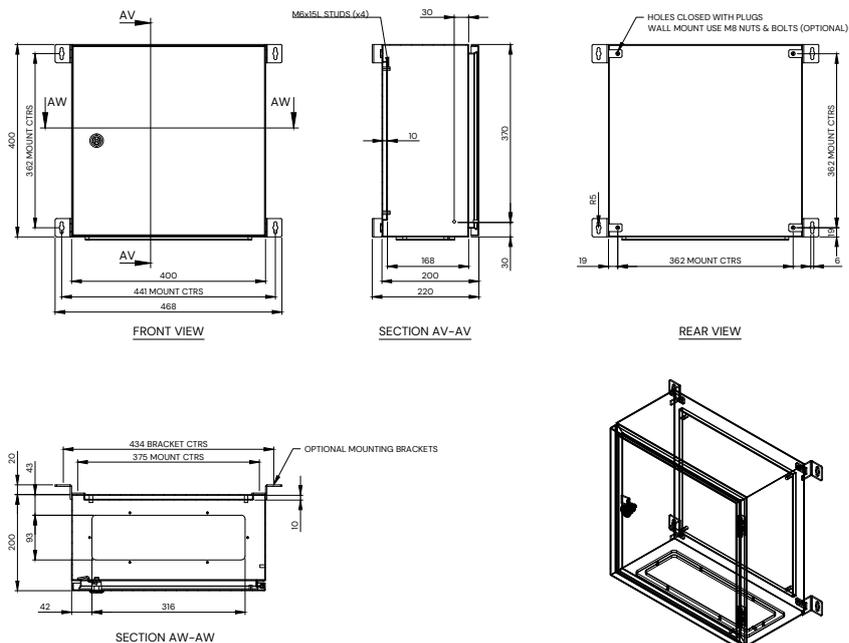

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-504025

500H x 400W x 250D





Versch 316 Stainless Steel Wall-Mounted Electrical Enclosures deliver dependable protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane seal and secure locking, this series is engineered to achieve IP66 ingress protection, providing solid performance for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 13 Kg.

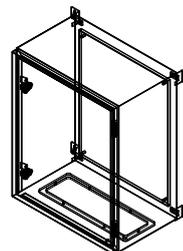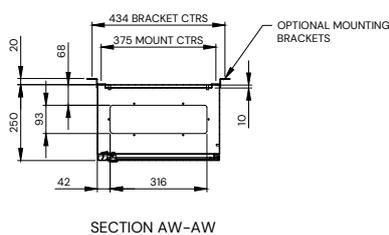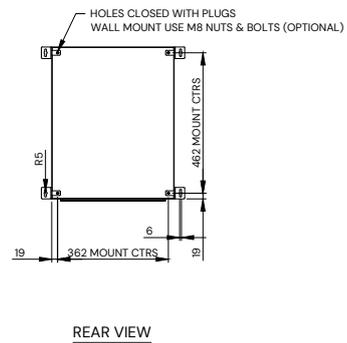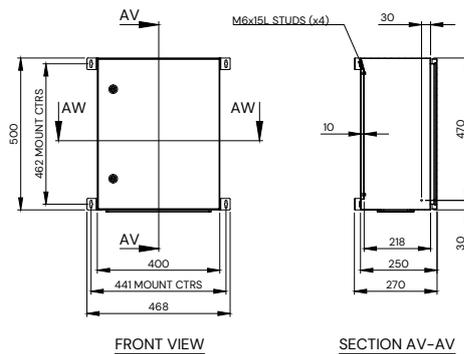

316 Stainless Steel | Single Door | IP66 IK10

# VE-316-606030

600H x 600W x 300D

Versch 316 Stainless Steel Wall-Mounted Electrical Enclosures deliver dependable protection for everyday electrical and control applications. Manufactured in 316L stainless steel with a continuous formed polyurethane seal and secure locking, this series is engineered to achieve IP66 ingress protection, providing solid performance for general industrial control, HVAC interfaces, pumps and irrigation, lighting and signage, and small PLC/IO applications.

**Protection Rating:** IP66 IK10

**Standards and Certifications:** IEC/EN 60529, IEC/EN 62208

**Materials:**

- Body: 1.5mm grade 316L stainless steel
- Door: 1.5mm grade 316L stainless steel
- Mounting Plate: 1.5mm electro-galvanised steel
- Gland Plate: 1.5mm grade 316L stainless steel
- Seal: Polyurethane
- Surface Finish: 4B finishing which equals to 0.4 to 0.8  $\mu\text{m}$
- Mass: 22 Kg.

