



Output DC -V -V +V +V



ELECTRICAL ENCLOSURES & POWER SUPPLIES

Economy Essentials. Built to Standard.

SINGLE DOOR | IP66 IK10

Electrical Enclosures


Protection Rating: IP66 IK10

Standards and Certifications: IEC/EN 60529, IEC/EN 62208

GALVANISED STEEL

Materials:

Body:	1.2mm electro-galvanised steel
Door:	1.5mm electro-galvanised steel
Mounting Plate:	1.5mm electro-galvanised steel
Gland Plate:	1.5mm electro-galvanised steel
Seal:	Polyurethane
Surface Treatment:	Powder-coat 80-120micron
Colour:	RAL7035

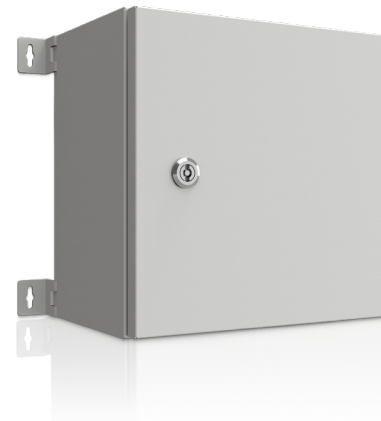

Part Number	Height	Width	Depth	Mass
VE-303020	300	300	200	6 kg
VE-403020	400	300	200	7 kg
VE-404020	400	400	200	9 kg
VE-504020	500	400	200	11 kg
VE-604025	600	400	250	13 kg
VE-606030	600	600	300	19 kg

304 / 316 STAINLESS STEEL

Materials:

Body:	1.5mm grade 304L / 316L stainless steel
Door:	1.5mm grade 304L / 316L stainless steel
Mounting Plate:	1.5mm electro-galvanised steel
Gland Plate:	1.5mm grade 304L / 316L stainless steel
Seal:	Polyurethane
Surface Treatment:	4B finishing which equals to 0.4 to 0.8 µm



304 Stainless Steel

Part Number	Height	Width	Depth	Mass
VE-304-302015	300	200	150	4 kg
VE-304-404020	400	400	200	10 kg
VE-304-504025	500	400	250	13 kg
VE-304-604020	600	400	200	14 kg
VE-304-606030	600	600	300	22 kg

316 Stainless Steel

Part Number	Height	Width	Depth	Mass
VE-316-303015	300	300	150	6 kg
VE-316-403020	400	300	200	8 kg
VE-316-404020	400	400	200	10 kg
VE-316-504025	500	400	250	13 kg
VE-316-606030	600	600	300	22 kg

VPS SERIES

DIN Rail Power Supply Series

Designed for industrial automation, control panels, and machine installations, these power supplies offer wide input ranges, advanced protection features, and reliable performance in harsh environments.

VPS1-075

The VERSCH VPS1-075 Series includes compact, high-efficiency DIN rail power supplies available in 12V, 24V, and 48V output variants.

Model	DC Voltage	Rated Current	Rated Power	Voltage Range	Over Voltage	Efficiency
VPS1-0751206	12V	6.3A	75.6W	12V~14V	14V~17V	85.5%
VPS1-0752403	24V	3.2A	76.8W	24V~28V	29V~33V	88.0%
VPS1-0754801	48V	1.6A	76.8W	48V~55V	56V~65V	88.0%



VPS1-120/150

The VERSCH VPS1-120/150 Series includes compact, high-efficiency DIN rail power supplies available in 12V, 24V, and 48V output variants.

Model	DC Voltage	Rated Current	Rated Power	Voltage Range	Over Voltage	Efficiency
VPS1-1201210	12V	10A	120W	12V~14V	14V~17V	85.5%
VPS1-1502405	24V	5A	120W	24V~28V	29V~33V	88.0%
VPS1-1504802	48V	2.5A	120W	48V~55V	56V~65V	89.0%



VPS1-240

The VERSCH VPS1-240 Series includes compact, high-efficiency DIN rail power supplies available in 12V, 24V, and 48V output variants.

Model	DC Voltage	Rated Current	Rated Power	Voltage Range	Over Voltage	Efficiency
VPS1-2402410	24V	10A	240W	24V~28V	14V~17V	87.0%
VPS1-2404805	48V	5A	240W	48V~55V	29V~33V	88.0%





YOUR POWER. BUILT TO STANDARD.

sales@versch.com.au

www.versch.com.au